

# 1. PE겸용 차단 H1(Ø63-Ø125)

천공기  
ART.370

|     |                       |
|-----|-----------------------|
| 관압  | 12 kg/cm <sup>2</sup> |
| PE관 | 63-125mm              |
| 강관  | 50mm-100mm<br>(2"-4") |
| 온도  | -10°C/+ 50°C          |

하우징 벨 형  
확장 스톱파



잠금 시스템



위치 선정 크램프

평 밸브




홀쏘 커터 강관용

PE용



## 2. PE겸용 차단 H1

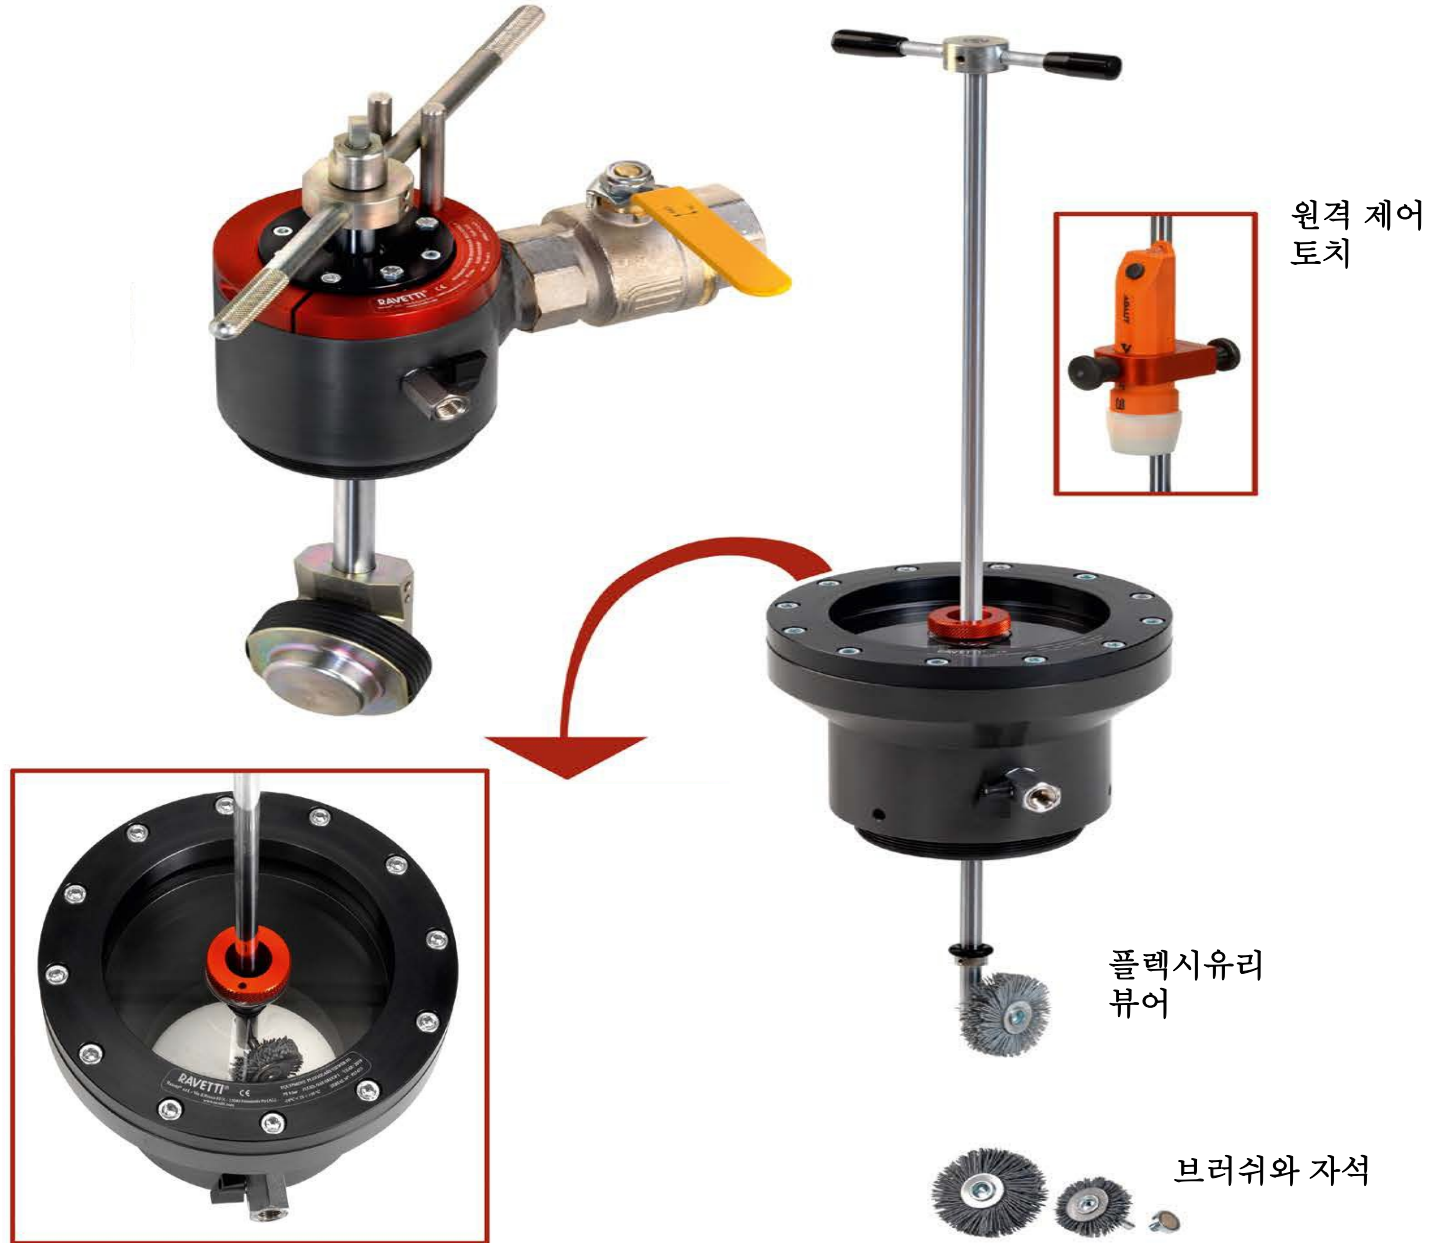

### 3. PE겸용 차단 H2

천공기  
ART.2000/50



|     |                        |
|-----|------------------------|
| 관압  | 12 kg/cm <sup>2</sup>  |
| PE관 | 160-225mm              |
| 강관  | 125mm-150mm<br>(5"-6") |
| 온도  | -10°C/+ 50°C           |

잠금 시스템



위치 선정 크램프



평 밸브

홀쏘 커터 PE용




홀쏘 커터 강관용



강관 어댑터

## 4. PE겸용 H2

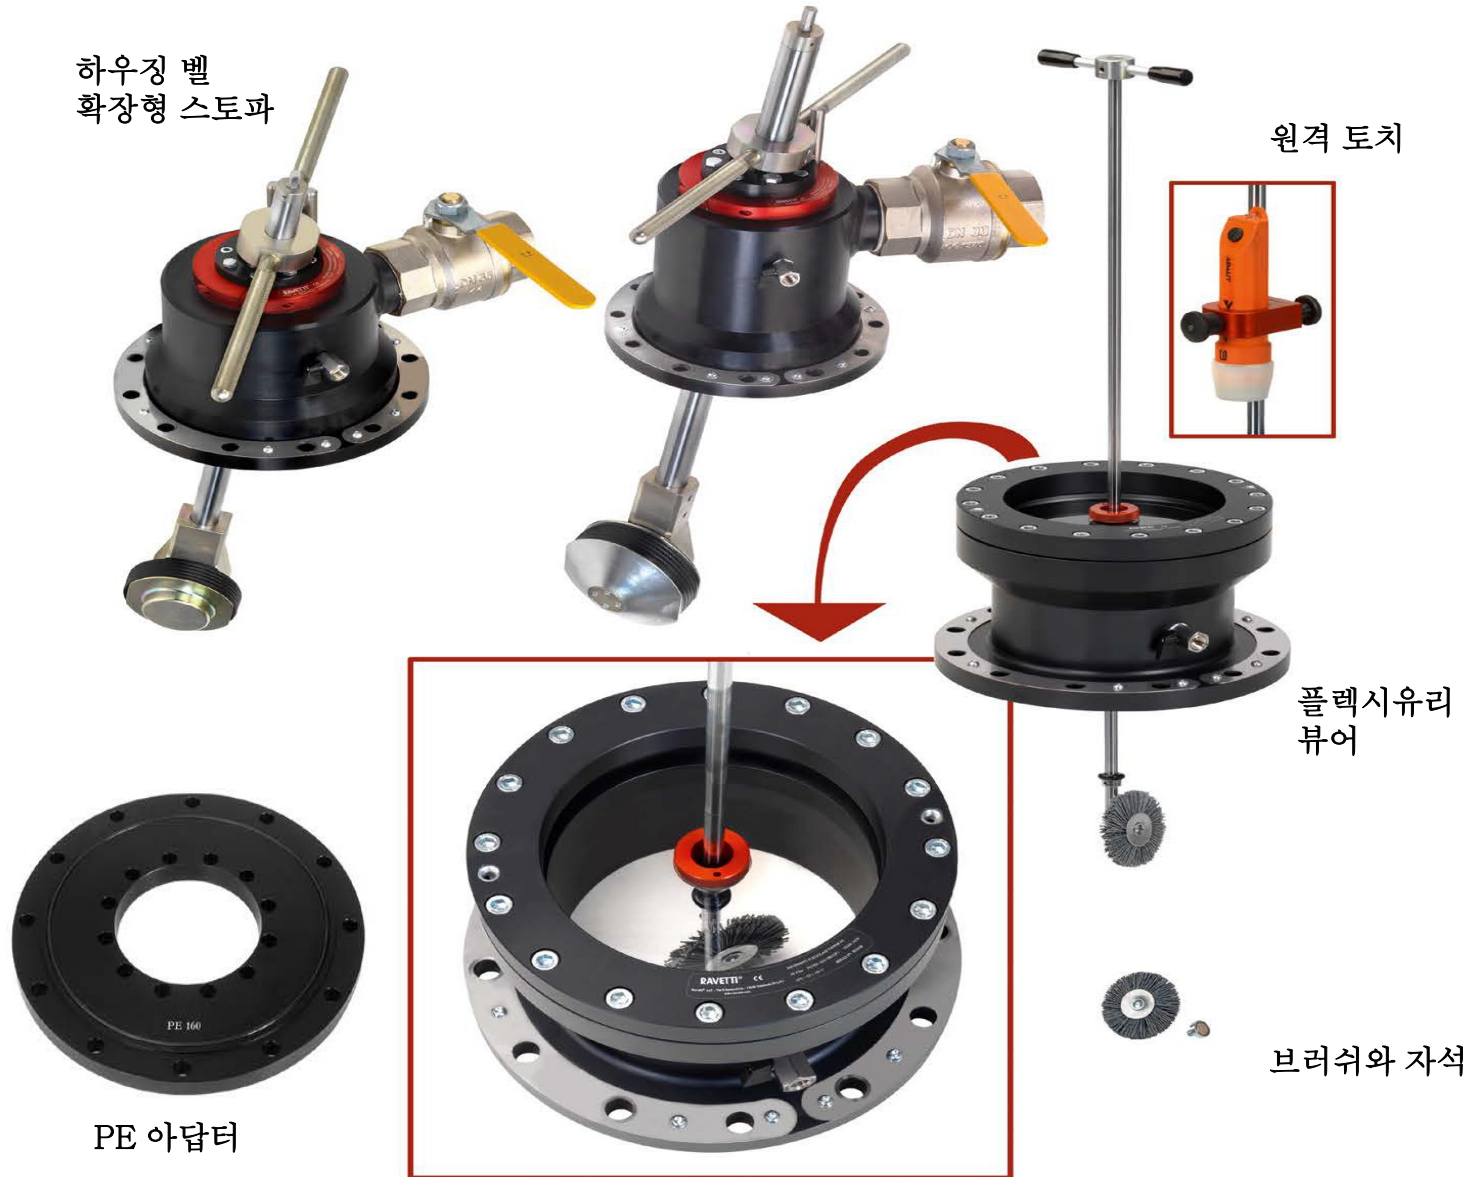

# 5. PE겸용 H3

천공기  
ART. 3000/50



|     |                         |
|-----|-------------------------|
| 관압  | 8 kg/cm <sup>2</sup>    |
| PE관 | 250-315mm               |
| 강관  | 200mm-250mm<br>(8"-10") |
| 온도  | -10°C/+ 50°C            |

잠금 시스템



위치 선정 크램프

평 밸브



강관 플랜지



홀쏘 PE용

PE 지상  
플랜지



PE  
플랜지



홀쏘 강관용

## 6. PE겸용 H3

